





| |
|--|
| Jordfeilbryter IDP |
| Antall poler: 4 |
| Antall moduler: 4 |
| Merkestrøm: 40A |
| Type: A |
| Utløserstrøm: 30mA |
| Merkespenning: (EN/IEC 61008-1, 61008-2-1) 400/415 V |
| Elnr: 1611297 |

| | | | |
|----------------------------------|---|---------------------------------|---|
| Standard; | IEC/EN 61009-1, IEC/EN 61009-2-1 | Frekvens (Hz) | 50/60 Hz |
| Isolasjonspenning | 500 V | Støtstrøm sikker 8/20 | 250A |
| Nominell impulsstøtspenning | 4 kV | Overspennings kategori | III |
| Antall inn/utkoblinger elektrisk | ≥ 10 000 | Antall inn/utkoblinger mekanisk | ≥ 20 000 |
| Tverrsnitt en leder kabel | ≤1x35 - ≤2x16 - ≤1x16+2x10 mm ² | Tverrsnitt fleksibel kabel | ≤1x35 - ≤2x16 - ≤1x16+2x10 mm ² |
| Tiltrekningsmoment | 3Nm | Driftstemperatur | -25 til + 60° C |
| Lagringstemperatur | -40 til + 70° C | Testknapp test | Hver 6 mnd |

Dimensjon

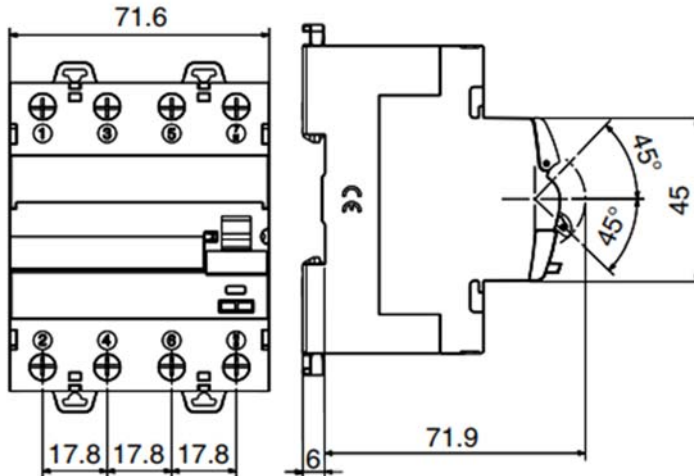

Koblings skjema 3 fas 230V

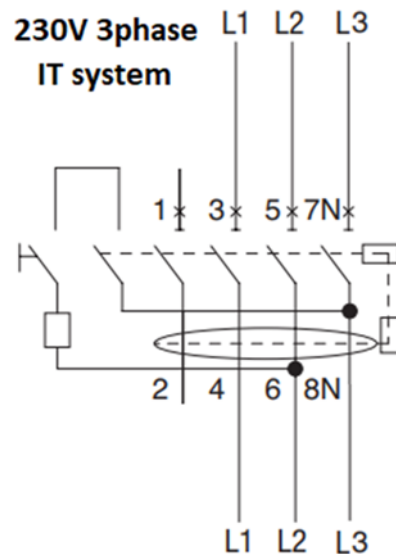

Standarder/godkjenninger

