




Modulær lastbryter
Antall poler: 3
Antall moduler: 3
Merkestrøm: 40A
Standard: AC-23B
Merkespenning: 240-415AC
Elnr: 1401326

Standard;	EN 60947-3	Frekvens (Hz)	50/60Hz
Merkestrøm (In)	40A	Isolasjonspenning	500V
Slutte kapasitet	400A	Effekt tap pr pol	1,5W
Bryte kapasitet	320A	Skrutrekker	PZ2
Kortslutning strøm (Icw)	480A	Tiltrekningsmoment	2Nm
IP	20	Driftstemperatur	- 5 til + 40° C
		Nominell impulsstøtspenning	4kV
Tverrsnitt en leder kabel	≤ 1x35 - ≤ 2x16 - ≤ 1x16+2x10mm ²	Tverrsnitt fleksibel kabel	≤ 1x35 - ≤ 2x16 - ≤ 1x16+2x10mm ²

Dimensjon

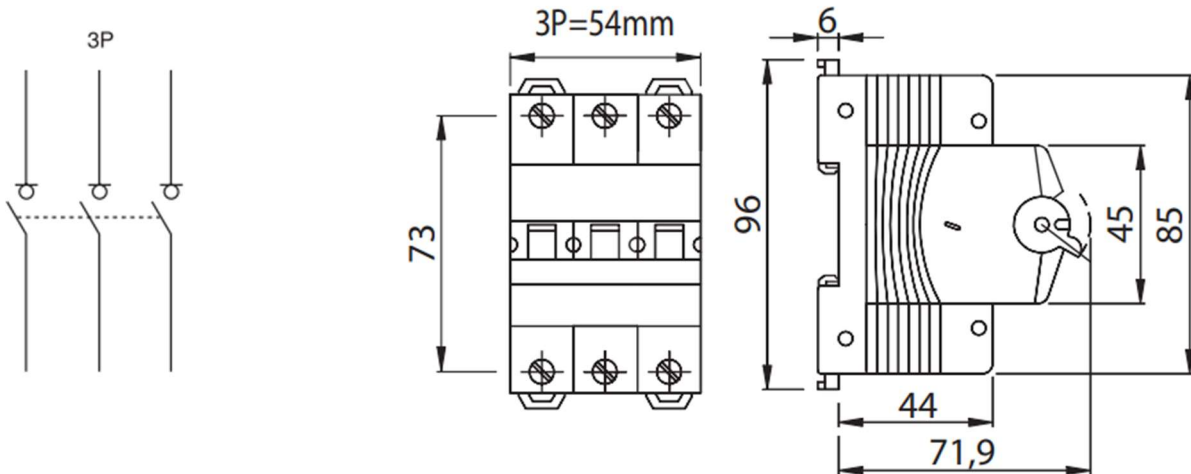

Standarder/godkjenninger

