




|                                     |
|-------------------------------------|
| DIN montert bryter for likespenning |
| Kontakt: 2P.                        |
| Antall moduler: 3,5                 |
| Merkestrøm: 25A                     |
|                                     |
|                                     |
|                                     |
| Merkespenning: 600VDC               |
| Varenummer: 1426422                 |

|                              |                   |                            |                   |
|------------------------------|-------------------|----------------------------|-------------------|
| Standard;                    | EN 60947-3        | Mekanisk av/på             | 10.000            |
| Kortslutningstrøm (Icw)      | 900A              | Isolasjonspenning          | 1500VDC           |
| Kortslutning kapasitet (Icm) | 900A              | Effekt tap pr pol DC21-B   | 5W                |
| Maks forankoblet sikring ICC | 5 (gL Gg max 63A) | Driftstemperatur           | -40 til + 65° C   |
| Tverrsnitt en leder kabel    | 16mm <sup>2</sup> | Tverrsnitt fleksibel kabel | 10mm <sup>2</sup> |

### Koblingskjema og kapasitet.

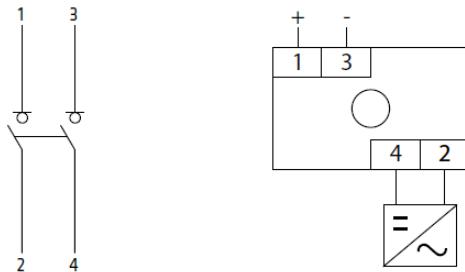

| DC-21B |      |      |      |      |       |
|--------|------|------|------|------|-------|
| 500V   | 600V | 700V | 800V | 900V | 1000V |
| 25A    | 25A  | 23A  | 25A  | 16A  | 11A   |
| DC-22B |      |      |      |      |       |
| 500V   | 600V | -    | 800V | -    | 1000V |
| 8A     | 6A   | -    | 2,5A | -    | 1,5A  |

Standarder/godkjenninger

