





DIN montert bryter for likespenning
Kontakt: 4P.
Antall moduler: 3,5
Merkestrøm: 32A
Merkespenning: 1000VDC
Varenummer: 1426441

Standard;	EN 60947-3	Mekanisk av/på	10.000
Kortslutningstrøm (Icw)	1000A	Isolasjonspenning	1500VDC
Kortslutning kapasitet (Icm)	1000A	Effekt tap pr pol DC21-B	5W
Maks forankoblet sikring ICC	5 (gL Gg max 80A)	Driftstemperatur	-40 til + 65° C
Tverrsnitt en leder kabel	16mm ²	Tverrsnitt fleksibel kabel	10mm ²

Koblingskjema og kapasitet.

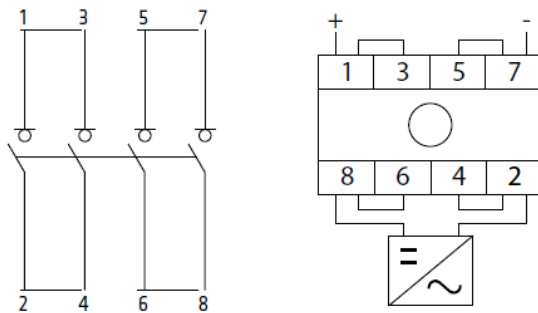

DC-21B					
500V	600V	700V	800V	900V	1000V
58A	50A	27A	23A	20A	13A

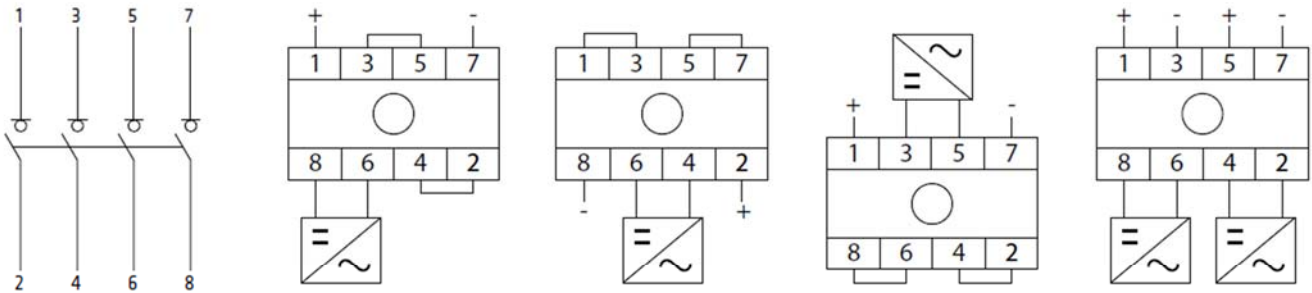

DC-21B					
500V	600V	700V	800V	900V	1000V
32A	32A	32A	32A	32A	32A
DC-22B					
500V	600V	-	800V	-	1000V
32A	27,5A	-	12,5A	-	10A

Standarder/godkjenninger 